



**VESA® Certified mDP80 Cable
in the World**



- VESA certified DP80 cable
- Feature high transmission capacities with the new data rates of UHBR10 (10 Gbps), UHBR13.5 (13.5 Gbps), and UHBR20 (20 Gbps)
- Support a max. data throughput of up to 80 Gbps
- Design for the connections of the most advanced visual display applications and systems
- Support a wider bandwidth in video streaming for higher resolution and quality of videos
- Support backward compatibility with existing DisplayPort devices




High-Speed Cables


Enhanced mDP Cable/Connector

Dimensions


Enhanced mDP80 0.8 Meter Twist-Pair/Coaxial

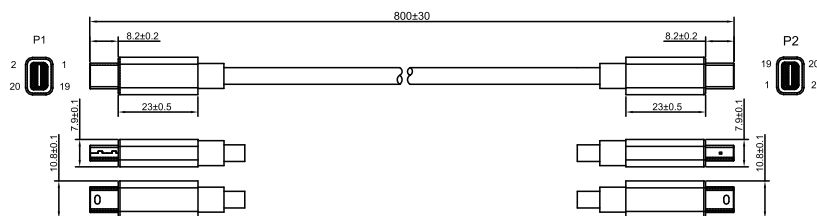

Enhanced mDP40 2 Meter Twist-Pair/Coaxial

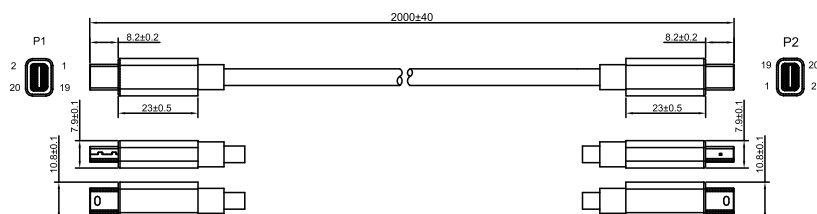

Enhanced mDP Receptacle Connectors

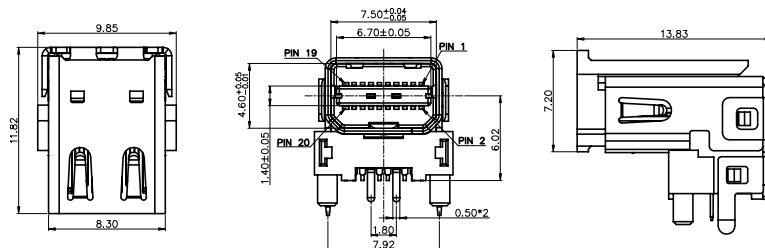

Unit: mm

Specifications

- Differential Impedance: 85+/-10 Ohm
- 30AWG Wires for DP 2.1 Signal
- DP80 Cable Supports up to UHBR20 Data Rate
- Comply with DP 2.1 Enhanced DP Connector/Cable Specifications

Part Series List

BizLink P/N	Length	Product Name	Data Rate	Cable Structure
117H0-089463-R1	0.8m	Enhanced mDP cable, DP80	up to UHBR20	Twist-Pair
117H0-078928-R1	0.8m	Enhanced mDP cable, DP80	up to UHBR20	Coaxial
117H0-089465-R1	2m	Enhanced mDP cable, DP40	UHBR10	Twist-Pair
117H0-082768-R1	2m	Enhanced mDP cable, DP40	UHBR10	Coaxial
115H0-028075-R1		Enhanced mDP connector DP80/DP40		



www.bizlinktech.com

Headquarters

BizLink Technology, Inc.
47211 Bayside Parkway, Fremont, CA 94538, USA
Phone +1 510 252 0786 sales@bizlinktech.com

© 2022 BizLink Group. All rights reserved.
BizLink and other trademarks are trademarks of BizLink Group or its subsidiaries.
Other trademarks may be trademarks of their respective owners.
Specifications are subject to change without prior notice.

Global Sales Contacts

USA	sales@bizlinktech.com	Japan	sales_japan@bizlinktech.com
Europe	sales_europe@bizlinktech.com	Malaysia	sales_malaysia@bizlinktech.com
China	sales_gc@bizlinktech.com	Taiwan	sales_tw@bizlinktech.com
India	sales_india@bizlinktech.com		

August 2022