

**Transceiver**

**100G CWDM4 (TOSA R-LD) OWOT-100R-11**




**Key Features**

- Up to 25.78125 ±100 ppm Operation (NRZ)
- Direct Modulation Laser (DML) Base Quad TOSA for CWDM4
- Useable with M37049G-16 CDR
- Integrated LDD
- 2 Wire Communication (Up to 400 kHz)
- CWDM4 Optical MUX Integrated
- Pigtail with LC Connector
- SMT Style for Electrical RF Signals

**Applications**

- CWDM4 MSA
- QSFP28/CFP2/CFP4 Transceiver Modules
- On Board Optics

**Modular Block Diagram**

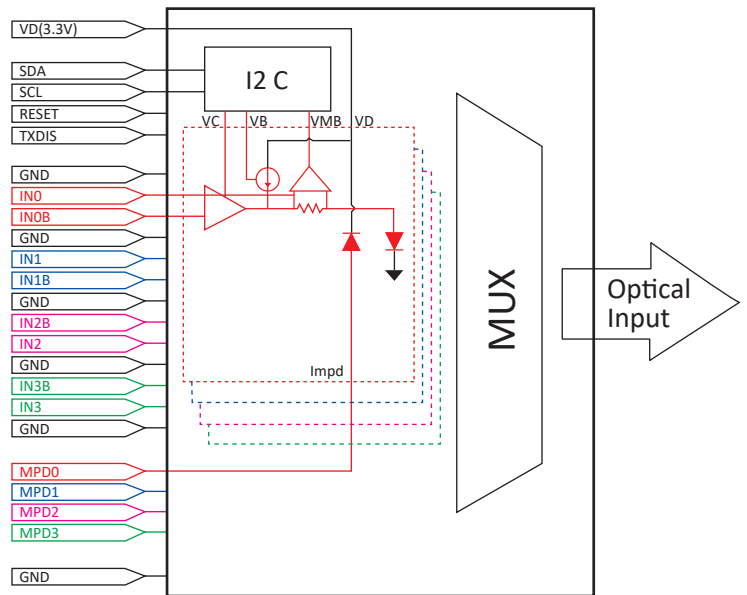

### Optical and Electrical Characteristics

T<sub>c</sub> = 0°C to 80°C, (unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.
Bit Rate		NRZ, each lane		25.781 Gb/s	
Operational Case Temperature	T <sub>c</sub>		0°C	25°C	80°C

#### Laser

Peak Wavelength for L0	L <sub>0</sub> <sup>1</sup>	for L0	1264.5 nm	1271 nm	1277.5 nm
	L <sub>1</sub> <sup>1</sup>	for L1	1284.5 nm	1291 nm	1297.5 nm
	L <sub>2</sub> <sup>1</sup>	for L2	1304.5 nm	1311 nm	1317.5 nm
	L <sub>3</sub> <sup>1</sup>	for L3	1324.5 nm	1331 nm	1337.5 nm
Average Output Power	P <sub>f</sub>	each lane <sup>1</sup>	-6.5 dBm	0.0 dBm	2.5 dBm
Total Average Launch Power	P <sub>T</sub>				8.5 dBm
Optical Modulation Amplitude	POMA <sub>I</sub>	each lane <sup>1</sup>	-4 <sup>2</sup> dBm	-0.65 dBm	2.5 dBm
Extinction Ratio <sup>1</sup>	ER		3.5 dB		
Optical Return Loss Tolerance	ORL				20 dB
Transmitter Reflectance	T <sub>R</sub>				-12 <sup>3</sup> dB
Side-mode Suppression Ratio	SSR		30 dB		
Transmitter and Dispersion Penalty	TDP	each lane, SMF = 2 km			3.0 <sup>4</sup> dB
Transmitter eye mask definition (X1, X2, X3, Y1, Y2, Y3) <sup>1, 4, 5</sup>		4 <sup>th</sup> Bessel		Refer to Figure1 (0.31, 0.4, 0.45, 0.34, 0.38, 0.4)	
Mask Margin	MM	5E-5		25%	

#### Monitor PD

Monitor PD Current	I <sub>mpd</sub>	P <sub>f</sub> = 0 dBm	TBD		TBD
Reverse Voltage	V <sub>rp</sub>	P <sub>f</sub> = 0 dBm	1.5 V		

### Optical and Electrical Characteristics

T<sub>c</sub> = 0°C to 80°C, (unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.
<b>I2C / Driver</b>					
Supply Voltage	V <sub>D</sub>		2.97 V	3.3 V	3.47 V
Supply Current	I <sub>D</sub>			TBD	TBD
DML Bias Current	I <sub>BIAS</sub>				70 mA
DML Bias Control Voltage	V <sub>B0~3</sub>				2.5 V
Modulation Control Voltage	V <sub>C0~3</sub>				2.5 V
Cross Point Control Voltage	V <sub>X0~3</sub>				1.0 V
Data Input Amplitude	I <sub>N</sub>	AC coupled	0.7 V <sub>ppd</sub>		1.5 V <sub>ppd</sub>
Input Logic Voltage High <sup>6</sup>	V <sub>IH</sub>	SDA, SCL, RESET, TXDIS	1.3 V	1.8 V	3.47 V
Input Logic Voltage Low <sup>6</sup>	V <sub>IL</sub>	SDA, SCL, RESET, TXDIS	0 V	0 V	0.4 V
Output Logic Voltage High <sup>6</sup>	V <sub>OH</sub>	SDA, I <sub>OH</sub> = I <sub>OL</sub> = 4 mA	1.5 V	1.7 V	1.92 V
Output Logic Voltage Low <sup>6</sup>	V <sub>OL</sub>	SDA, I <sub>OH</sub> = I <sub>OL</sub> = 4 mA		0 V	0.3 V
<b>Total Power Dissipation</b>	P <sub>total</sub>			TBD	TBD

1: 25.8 Gbps, PRBS = 231-1.

2: Even if the TDP < 1.0dB, the OMA (min) must exceed this value.

3: Transmitter reflectance is defined looking into the transmitter.

4: TDP does not include a penalty for multi-path interference (MPI).

5: See mark in Figure 1.

6: See recommended circuit in Figure 2.

Figure 1. Transmitter Eye Mask


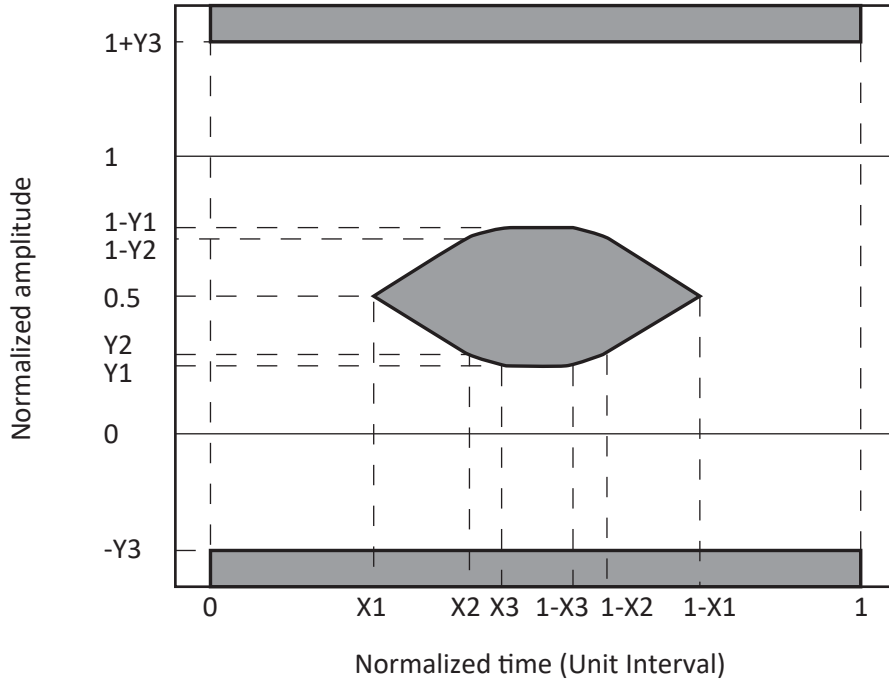


Figure 2. Recommended Circuit

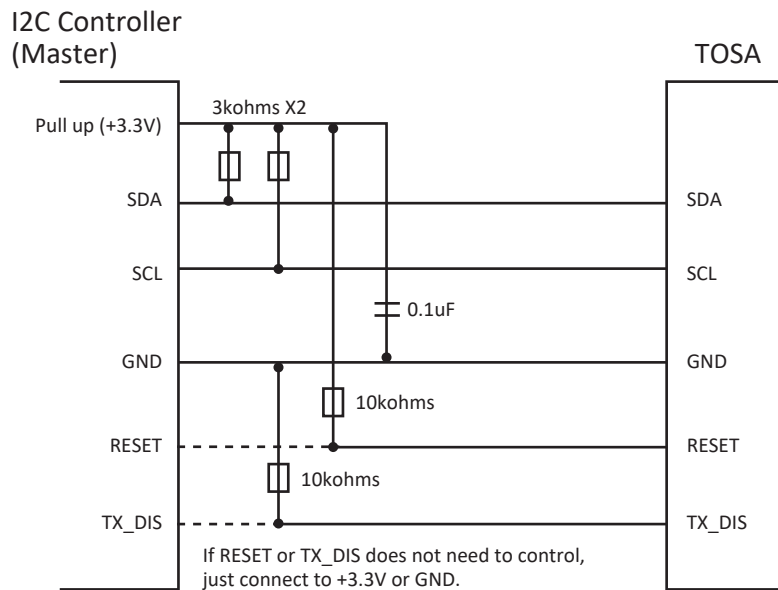


### Absolute Maximum Ratings

T<sub>c</sub> = 25°C, (unless otherwise specified)

Parameter	Symbol	Condition	Min.	Max.
Supply Voltage	VD		-0.3 V	3.6 V
Data Input Amplitude	IN0~3	AC coupled		2.5 Vppd
Monitor Photodiode Forward Current	Impd_f			10 mA
Monitor Photodiode Reverse Voltage			20 V	
Storage Temperature	Tstg		-40 degC	85 degC
Electrical Discharge Voltage(HBM)	VESD,HBM			TBD

### Dimensions

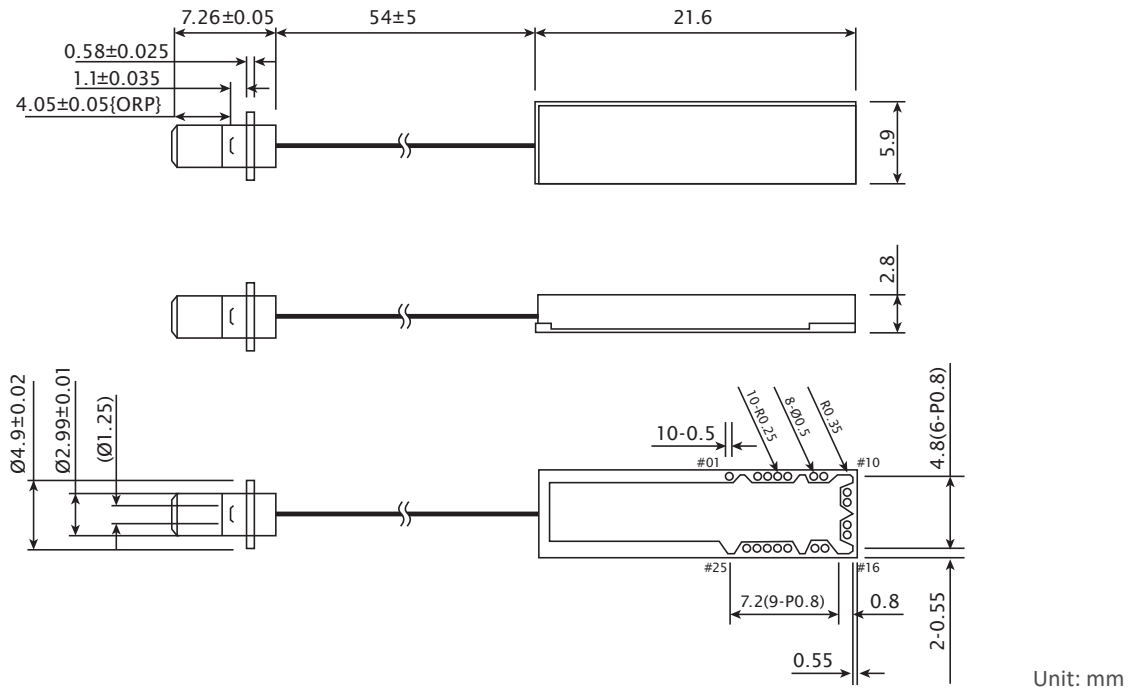

### Pin Configuration

Pin#	Symbol	Description	Pin#	Symbol	Description
1	N/C	No Connection	14	IN1	Positive data input for L1
2,7,10,13,16,19,25	GND	Ground	15	IN1B	Negative data input for L1
3	MPD0	Monitor PD anode for L0	17	INO	Positive data input for L0
4	MPD1	Monitor PD anode for L1	18	IN0B	Negative data input for L0
5	MPD2	Monitor PD anode for L2	20	SDA	Two-wire serial interface data
6	MPD3	Monitor PD anode for L3	21	SCL	Two-wire serial interface clock
8	IN3B	Negative data input for L3	22	TXDIS	Global power down for disable, active high
9	IN3	Positive data input for L3	23	VD	+3.3 Voltage Power Supply
11	IN2B	Negative data input for L2	24	RESET	Reset signal, active high
12	IN2	Positive data input for L2			

### OptiWorks Headquarters

#### OptiWorks, Inc.

47211 Bayside Parkway, Fremont, CA 94538, USA  
Phone +1 510 438 4560  
sales@optiworks.com  
www.optiworks.com

#### OptiWorks (Kunshan) Co., Ltd.

No. 168, Nanhe Rd., Kunshan Economic & Technology Development Zone, Kunshan City, Jiangsu 215300, China  
Phone +86 512 5763 0863  
contact@optiworks.com

© 2020 BizLink Group. All rights reserved.  
BizLink, OptiWorks, and other trademarks are the trademarks of BizLink Group or its subsidiaries.  
Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
Specifications are subject to change without prior notice. April 2020

#### OptiWorks (Shanghai) Co., Ltd.

Room 810-811, Changchun Business Building, No. 953 Qinzhou North Road, Shanghai 200233, China  
Phone +86 021 6485 8787  
contact@optiworks.com