

# BizLink


## TYPE 282/2

### Plug for safety class I

2-pole plug with dual earthing-contacts, splash-proof IP44,  
available with double insulation  
SNI 04-3892, IEC 60884-1, SS VII-CEE 7,  
16 A, 250 V~



### Technical drawing

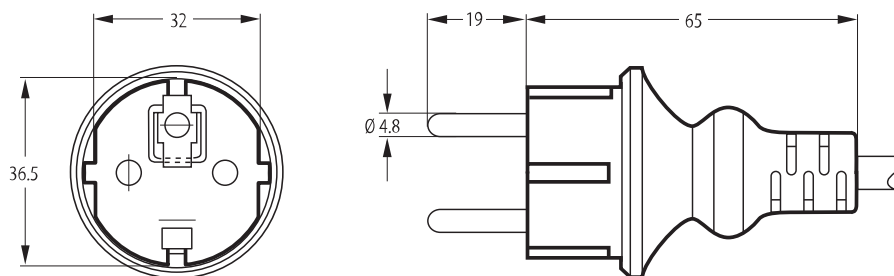

### Approvals



### Suitable flexible cord types

H05RN-F	3 G 0.75	H05RN-F	3 G 1
H05RR-F	3 G 0.75	H05RR-F	3 G 1
H05RR-F	3 G 1.5	H05RR-F	3 G 2.5
H05VV-F	3 G 0.75	H05VV-F	3 G 1
H05VV-F	3 G 1.5	H05BB-F	3 G 0.75
H05BB-F	3 G 1	H05BB-F	3 G 1.5
H05BB-F	3 G 2.5	H05BQ-F	3 G 0.75
H05BQ-F	3 G 1	H07BB-F	3 G 1
H07BB-F	3 G 1.5	H07RN8-F	3 G 1
H07RN8-F	3 G 1.5	H07BN4-F	3 G 1
H07BN4-F	3 G 1.5	H07BQ-F	3 G 1
H07BQ-F	3 G 1.5	H07BQ-F	3 G 2.5
H07RN-F	3 G 1	H07RN-F	3 G 1.5

