


Power Cord


TYPE 3120 3-pole/Safety Class I

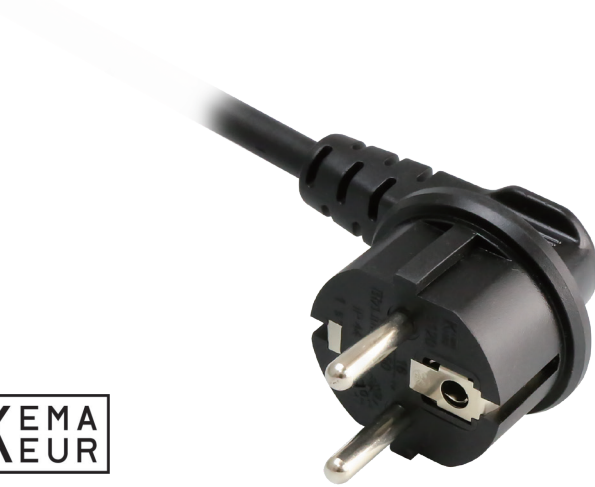

Key Features

- IEC 60884-1, SS XVII-CEE 7
- 16 A, 250 V~
- Splash-Proof IP44

Dimensions

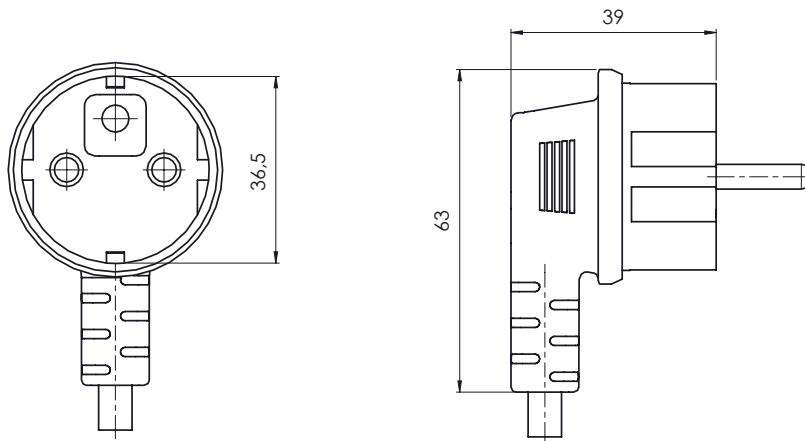

Unit: mm

Suitable Flexible Cord Types

H05BQ-F	3 G 1	H05BB-F	3 G 1.5
H07BQ-F	3 G 1.5	H05VV-F	3 G 2.5
H07RN-F	3 G 1.5	H05V2V2-F	3 G 2.5

Headquarters

BizLink Technology, Inc.
47211 Bayside Parkway, Fremont, CA 94538, USA
Phone +1 510 252 0786

Global Sales Contact

Bizlink Technology (Belgium) N.V.
Kempische Steenweg 293 Bus 10, 3500, Hasselt, Belgium
Phone +32 11 260 260 ea_info@bizlinktech.com

© 2021 BizLink Group. All rights reserved.
BizLink and other trademarks are trademarks of BizLink Group or its subsidiaries.
Other trademarks may be trademarks of their respective owners.
Specifications are subject to change without prior notice. May 2021

