

Branch Cable**DC Branch Cable 1500V/1000V**

1 to 2



1 to 3



2 to 3



3 to 3




- Consist of assembled, hermetically-sealed branch connection with choices of pre-assembled connectors terminating each PV cable ends
- Eliminate the associated high impedance from bad crimps and the need for in-field stripping and crimping



Branch Cable
DC Branch Cable 1500V/1000V

Dimensions

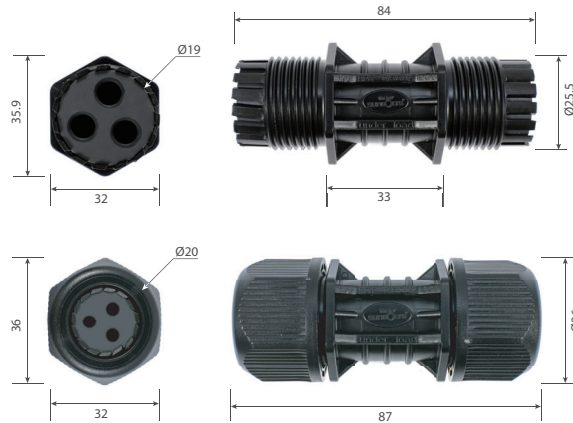


Customization Services

- Connectors
- Cable Length
- Cable Types
- Branch Trunks

Unit: mm

Configuration Info

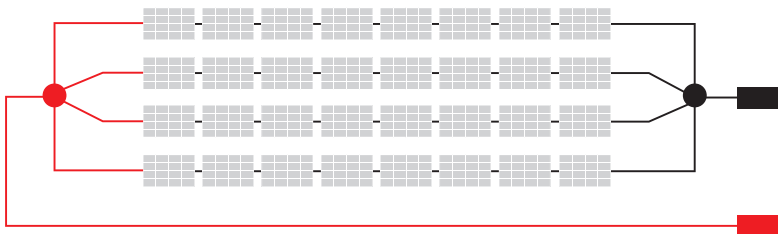

- Parallel multiple strings in one output
- Require shorter cable length with lower resistance
- Increase power efficiency in field

Specifications

Housing	PPO
Rated Voltage	1500V/1000V
Rated Current	TÜV 53A/UL 65A
Protection Degree	IP68 (mating with BizLink S418 connectors)
Temperature Range	TÜV -40°C ~ +90°C/UL -40°C ~ +85°C
Cable Size	2.5/4/6/10 mm ² or 6/8/10/12/14 AWG
Connector Option	BizLink S418, MC4, MC4-EVO2, H4, or UTX



BizLink Headquarters

BizLink Technology, Inc.
 47211 Bayside Parkway, Fremont, CA 94538, USA
 Phone +1 510 252 0786 sales@bizlinktech.com

Global Sales Contacts

USA	+1 800 326 4193	India	+91 40 6793 3618	Malaysia	+60 4 399 4428
China	+86 775 3384 5888	Japan	+81 3 6435 2918	Taiwan	+886 2 8226 1000
Europe	+353 1 462 6126				