

BizLink

TYPE 736

Appliance connector for safety class I


2-pole with earthing contact, angled, SS C 13, splash-proofed by o-ring

IEC 60320-1, SS C 13

10 A, 250 V~



Technical drawing

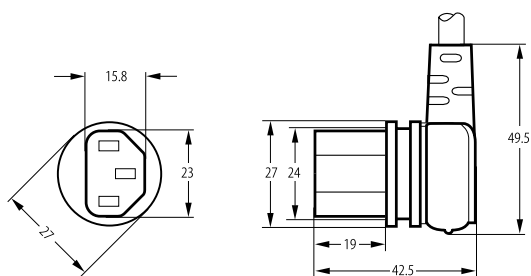

Approvals



Suitable flexible cord types

H05BQ-F

3 G 1