

BizLink

TYPE 375

Plug for safety class I

2-pole plug with earthing-contact


NBR 14136

10 A, 250 V~

pins provided with insulating sleeves, nickel-plated



Technical drawing

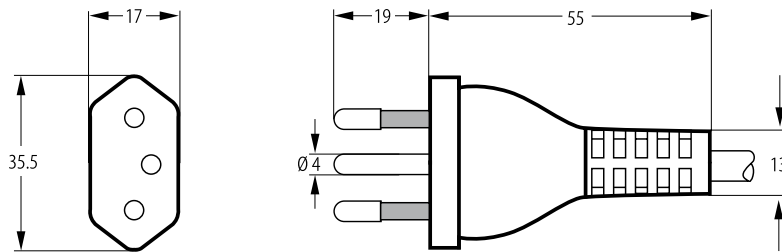

Approvals



Suitable flexible cord types

H03VV-F	3 G 0.75	H03V2V2-F	3 G 0.75
H03RT-H	3 G 0.75	H03RT-H	3 G 1
H05VV-F	3 G 0.75	H05VV-F	3 G 1
H05V2V2-F	3 G 0.75	H05V2V2-F	3 G 1
H05RN-F	3 G 0.75	H05RN-F	3 G 1
H07RN-F	3 G 1		