

# BizLink

## TYPE 300

### Plug for safety class I

2-pole plug with dual earthing-contacts, available with double insulation


IEC 60884-1, SS VII-CEE 7, KC 60884-1, KSC 8305

16 A, 250 V~

solid metal pins, nickel-plated



### Technical drawing

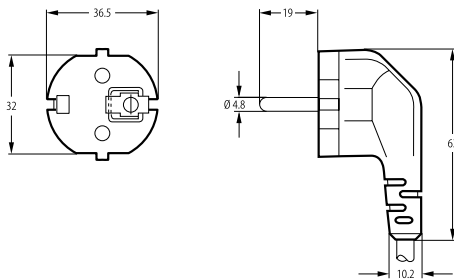

### Approvals



### Suitable flexible cord types

#### Europe

<b>H03VV-F</b>	3 G 0.75	<b>H05VV-F</b>	3 G 0.75
<b>H05VV-F</b>	3 G 1	<b>H05VV-F</b>	3 G 1.5
<b>H05V2V2-F</b>	3 G 0.75	<b>H05V2V2-F</b>	3 G 1
<b>H05V2V2-F</b>	3 G 1.5	<b>H03RT-H</b>	3 G 0.75
<b>H03RT-H</b>	3 G 1	<b>H05RR-F</b>	3 G 0.75
<b>H05RR-F</b>	3 G 1	<b>H05RR-F</b>	3 G 1.5
<b>H05RN-F</b>	3 G 0.75	<b>H05RN-F</b>	3 G 1
<b>H07RN-F</b>	3 G 1	<b>H07RN-F</b>	3 G 1.5
<b>H05Z1Z1-F*</b>	3 G 0.75	<b>H05Z1Z1-F*</b>	3 G 1
<b>H05Z1Z1-F*</b>	3 G 1.5	<b>H03Z1Z1-F</b>	3 G 0.5
<b>H03Z1Z1-F</b>	3 G 0.75	<b>H05Z1Z1-F</b>	3 G 0.75
<b>H05Z1Z1-F</b>	3 G 1	<b>H05Z1Z1-F</b>	3 G 1.5

#### Korea

<b>H03VV-F</b>	3 G 0.5	<b>H03VV-F</b>	3 G 0.75
<b>H03V2V2-F</b>	3 G 0.5	<b>H03V2V2-F</b>	3 G 0.75
<b>H05VV-F</b>	3 G 0.75	<b>H05VV-F</b>	3 G 1
<b>H05VV-F</b>	3 G 1.5	<b>H05V2V2-F</b>	3 G 0.75
<b>H05V2V2-F</b>	3 G 1	<b>H05V2V2-F</b>	3 G 1.5

# BizLink

TYPE 300

## Suitable flexible cord types

<b>H05RR-F</b>	3 G 0.75	<b>H05RR-F</b>	3 G 1
<b>H05RR-F</b>	3 G 1.5	<b>H05RN-F</b>	3 G 0.75
<b>H05RN-F</b>	3 G 1	<b>H07RN-F</b>	3 G 1
<b>H07RN-F</b>	3 G 1.5		

\* KEMA approval