SUNBOLTS
Photovoltaic Connection

接线盒系列 S41A 1500V/1000V 17A

焊接式

夹接式

耐流30A二极管提供17A
短路电流模组应用



使用宽薄的导电片增加散热

- 专为高效400W与高短路电流的模组设计
- 宽薄型的导电片在17A额定电流下散热能更有效率
- 选用高耐流二极体增加可靠度与产品寿命
- 特别的弹片设计使汇流条安装/卸除更便利
- 过IEC与UL双认证的S41A最适用在1500V/1000V的太阳能案场

接线盒系列

S41A 1500V/1000V 17A

SUNBOLTS
Photovoltaic Connection

机构

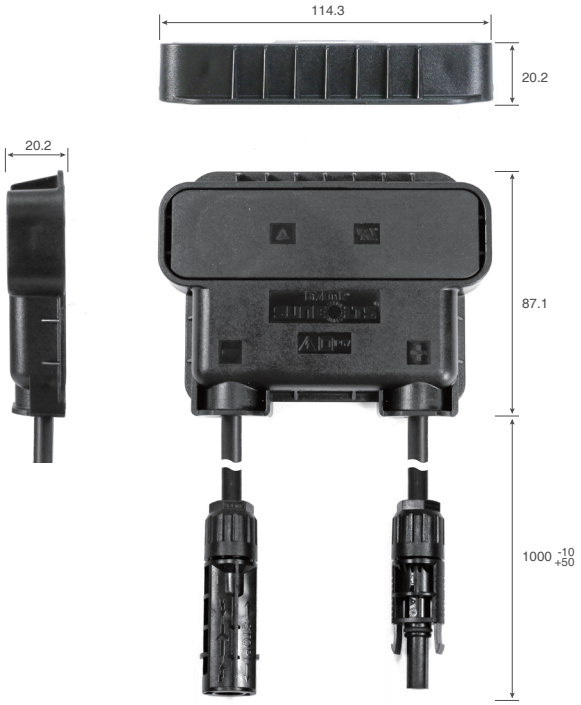

单位: mm

规格

额向电流	17A
逆向电流	30A
额定电压	1500V/1000V DC
防水等级	IP67
工作温度	-40°C ~ +90°C
焊带连接方式	焊接 / 夹接
防火等级	外部: 5VA　内部: V-0
塑壳材质	PPE
二极管规格	30A45V *3
应用等级	等級A
导电片间距	19~22mm
焊带宽度	最大10mm (依间距)
接触材质设计	铜合金镀锡
二极管连结	焊接
连接器	BizLink S418, MC4, MC4-EVO2, H4, UTX
盒体尺寸	114.3mm x 87.1mm x 20.0mm

BizLink

www.bizlinktech.com

BizLink Headquarters
BizLink Technology, Inc.
47211 Bayside Parkway, Fremont, CA 94538, USA
Phone +1 510 252 0786　sales@bizlinktech.com

Global Sales Contacts

USA	+1 800 326 4193	**India**	+91 40 6793 3618	**Malaysia**	+60 4 399 4428
China	+86 775 3384 5888	**Japan**	+81 3 6435 2918	**Taiwan**	+886 2 8226 1000
Europe	+353 1 462 6126				

© 2018 BizLink Group. All Rights Reserved.
BizLink, Sunbolts, and other trademarks are trademarks of BizLink Group or its subsidiaries. Other trademarks may be trademarks of their respective owners.
Specifications are subject to change without prior notice.　November 2018