

BizLink

TYPE 340 South Africa

Plug for safety class I + II

2-pole plug with/without earthing-contact


SANS 164-1

16 A, 250 V~

pins provided with insulating sleeves, nickel-plated



Technical drawing

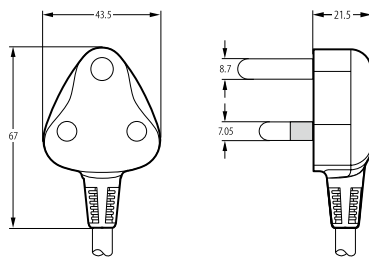

Approvals

Suitable flexible cord types

H03VVH2-F	2 x 0.75	H05VVH2-F	2 x 0.75
H05VVH2-F	2 x 1	H05VV-F	2 x 0.75
H05VV-F	2 x 1	H05RN-F	2 x 0.75
H05RN-F	2 x 1	H05RR-F	2 x 0.75
H05RR-F	2 x 1	H03VV-F	3 G 0.75
H03RT-H	3 G 0.75	H03RT-H	3 G 1
H05VV-F	3 G 0.75	H05VV-F	3 G 1
H05VV-F	3 G 1.5	H05RN-F	3 G 0.75
H05RN-F	3 G 1	H05RR-F	3 G 0.75
H05RR-F	3 G 1	H05BQ-F	3 G 1