SUNBOLTS
Photovoltaic Connection

接线盒系列 S411 1500V/1000V 16A 分体式



分体式:
模组连接可使用较短线材



传统式:
模组连接需使用较长线材

- 专为双面模组设计的细薄型接线盒，可避免盒体遮荫
- 分离式盒体设计可节省线缆长度与减少功率损耗，选用高耐流二极体与全灌胶设计以增强产品可靠度与寿命
- 通过IEC与UL双认证的S411最适用在1500V/1000V的太阳能案场

接线盒系列

S411 1500V/1000V 16A 分体式

SUNBOLTS
Photovoltaic Connection

Benefit

专为双面模组的窄型设计

機構

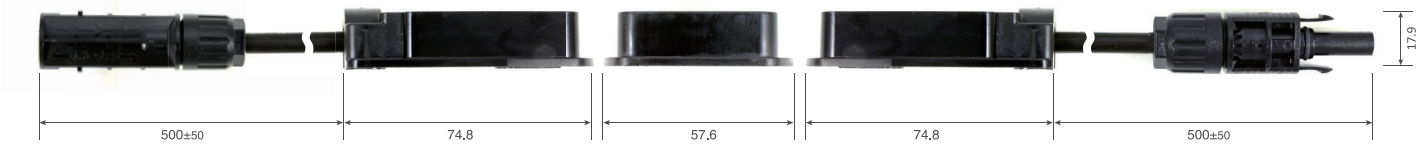

单位: mm

规格

额定电流	16A
逆向电流	30A
额定电压	1500V/1000V DC
防水等级	IP67(全灌膠)
工作温度	-40°C~ +90°C
焊带连接方式	焊接
防火等级	外部: 5VA　内部: V-0
塑壳材质	PPE
应用等级	等級 A
导电片间	19~22mm
焊带宽度	Max 8mm (依间距)
接触材质设计	铜合金镀锡
二极管连结	焊接
二极管规格	45V30A *3
连接器	BizLink S418, MC4, MC4-EVO2, H4, UTX
盒体尺寸	左及右: 74.8mm x 34mm x 17.9mm, 中: 57.6mm x34mm x 17.9mm

BizLink

www.bizlinktech.com

BizLink Headquarters

BizLink Technology, Inc.
47211 Bayside Parkway, Fremont, CA 94538, USA
Phone +1 510 252 0786　sales@bizlinktech.com

Global Sales Contacts

USA	+1 800 326 4193	**India**	+91 40 6793 3618	**Malaysia**	+60 4 399 4428
China	+86 775 3384 5888	**Japan**	+81 3 6435 2918	**Taiwan**	+886 2 8226 1000
Europe	+353 1 462 6126				

© 2018 BizLink Group. All Rights Reserved.
BizLink, Sunbolts, and other trademarks are trademarks of BizLink Group or its subsidiaries. Other trademarks may be trademarks of their respective owners.
Specifications are subject to change without prior notice.　January 2019