

BizLink

TYPE 256

Plug for safety class II

2-pole plug


JIS C8303

7 A/12 A/15 A, 125 V~

solid metal pins, nickel-plated



Technical drawing

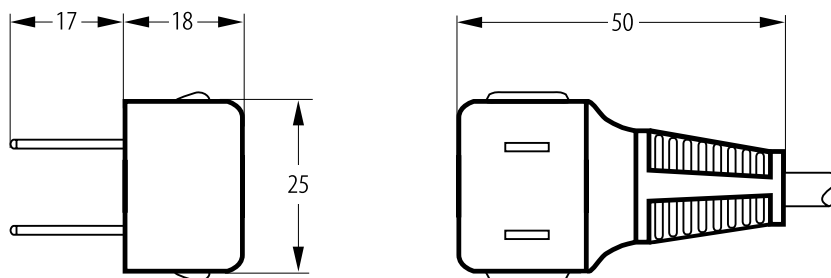

Approvals



Suitable flexible cord types

Japanese cord

2 x 0.75 mm²

Japanese cord

2 x 1.25 mm²

Japanese cord

2 x 2.0 mm²