

BizLink

TYPE CW3191 Indonesia

Plug for safety class I

2-pole plug with dual earthing-contacts, available with double insulation

SNI 04-3892


16 A, 250 V~

available with protection cap

solid metal pins, nickel-plated



Technical drawing

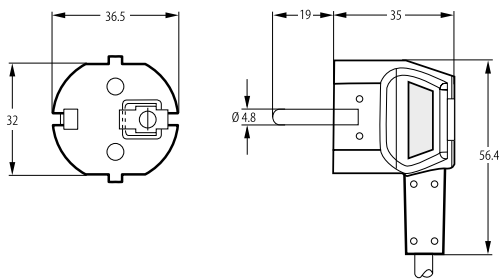

Approvals



Suitable flexible cord types

H05VV-F	3 G 0.75	H05VV-F	3 G 1
H05VV-F	3 G 1.5		