

BizLink


TYPE 240

Plug for safety class II

2-pole contour plug, splash-proof IP44
IEC 60884-1, SS VII-CEE 7
16 A, 250 V~



Technical drawing

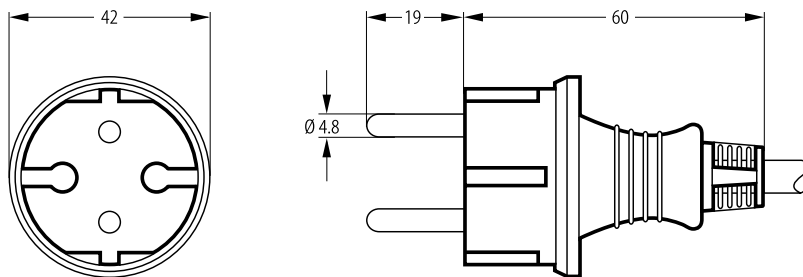

Approvals



Suitable flexible cord types

H03VV-F	2 x 0.75	H05VV-F	2 x 0.75
H05VV-F	2 x 1	H05VV-F	2 x 1.5
H05RR-F	2 x 0.75	H05RR-F	2 x 1
H05RN-F	2 x 0.75	H05RN-F	2 x 1
H07RN-F	2 x 1	H07RN-F	2 x 1.5
H05BQ-F	2 x 1	H07BQ-F	2 x 1
H07BQ-F	2 x 1.5		