

# BizLink

## TYPE 274

### Plug for safety class I + II

2-pole with/without earthing-contact and fuse

BS 1363-1, SS 145-1


3 A/5 A/ 10 A/ 13 A

6 A/10 A/13 A, 250 V~

pins provided with insulating sleeves, nickel-plated



### Technical drawing

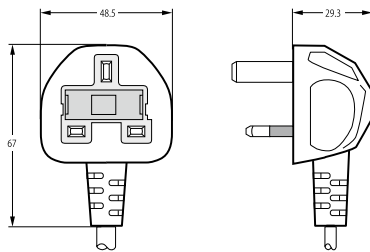

### Approvals



### Suitable flexible cord types

H03VV-F	2 x 0.75	H03VVH2-F	2 x 0.5
H03VVH2-F	2 x 0.75	H05VV-F	2 x 0.75
H05VV-F	2 x 1	H05VV-F	2 x 1.5
H05VVH2-F	2 x 0.75	H05VVH2-F	2 x 1
H05V2V2-F	2 x 0.75	H05V2V2-F	2 x 1
H05V2V2H2-F	2 x 0.75	H05V2V2H2-F	2 x 1
H05RR-F	2 x 0.75	H05RR-F	2 x 1
H05RN-F	2 x 0.75	H05RN-F	2 x 1
H07RN-F	2 x 1	H07RN-F	2 x 1.5
H07BQ-F	2 x 1	H07BQ-F	2 x 1.5
H03VV-F	3 G 0.75	H05VV-F	3 G 0.75
H05VV-F	3 G 1	H05VV-F	3 G 1.5
H03RT-H	3 G 0.75	H03RT-H	3 G 1
H03RT-H	3 G 1.5	H05RR-F	3 G 0.75
H05RR-F	3 G 1	H05RR-F	3 G 1.5
H05RN-F	3 G 0.75	H05RN-F	3 G 1
H07RN-F	3 G 1	H07RN-F	3 G 1.5
H07RN8-F	3 G 1	H05BQ-F	3 G 0.75
H05BQ-F	3 G 1	H07BQ-F	3 G 1
H07BQ-F	3 G 1.5	H05BB-F	3 G 1



TYPE 274

**Suitable flexible cord types**

---

**H05BB-F**

3 G 1.5

---