

# BizLink

## TYPE 365

### Plug for safety class I

2-pole plug with dual earthing-contacts, available with double insulation


IEC 60884-1, SS VII-CEE 7, KC 60884-1, KSC 8305

16 A, 250 V~

solid metal pins, nickel-plated



### Technical drawing

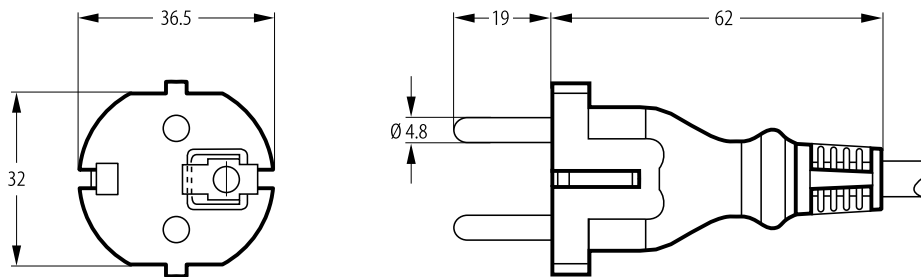

### Approvals



### Suitable flexible cord types

#### Europe

H03VV-F	3 G 0.75	H05VV-F	3 G 0.75
H05VV-F	3 G 1	H05VV-F	3 G 1.5
H05V2V2-F	3 G 0.75	H05V2V2-F	3 G 1
H05V2V2-F	3 G 1.5	H03RT-H	3 G 0.75
H03RT-H	3 G 1	H05RR-F	3 G 0.75
H05RR-F	3 G 1	H05RR-F	3 G 1.5
H05RN-F	3 G 0.75	H05RN-F	3 G 1
H07RN-F	3 G 1	H07RN-F	3 G 1.5
H05Z1Z1-F*	3 G 0.75	H05Z1Z1-F*	3 G 1
H05Z1Z1-F*	3 G 1.5	H03Z1Z1-F	3 G 0.5
H03Z1Z1-F	3 G 0.75	H05Z1Z1-F	3 G 0.75
H05Z1Z1-F	3 G 1	H05Z1Z1-F	3 G 1.5

#### Korea

H03VV-F	3 G 0.5	H03VV-F	3 G 0.75
H03V2V2-F	3 G 0.5	H03V2V2-F	3 G 0.75
H05VV-F	3 G 0.75	H05VV-F	3 G 1
H05VV-F	3 G 1.5	H05V2V2-F	3 G 0.75
H05V2V2-F	3 G 1	H05V2V2-F	3 G 1.5

## TYPE 365

### Suitable flexible cord types

<b>H05RR-F</b>	3 G 0.75	<b>H05RR-F</b>	3 G 1
<b>H05RR-F</b>	3 G 1.5	<b>H05RN-F</b>	3 G 0.75
<b>H05RN-F</b>	3 G 1	<b>H07RN-F</b>	3 G 1
<b>H07RN-F</b>	3 G 1.5		

\* KEMA approval